



Alpha-1500/ 1700 Series Quick Installation (Faucet)

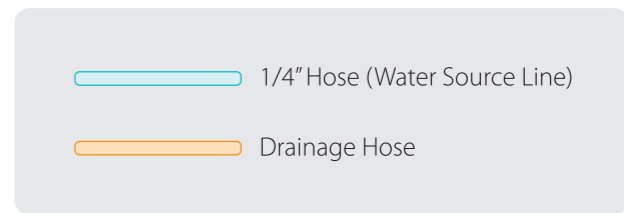


Unscrew the existing aerator from your faucet.

1. Shut off the main water supply (both hot and cold water) by closing the main valve under the sink.
Remove the existing aerator from the tip of the faucet.

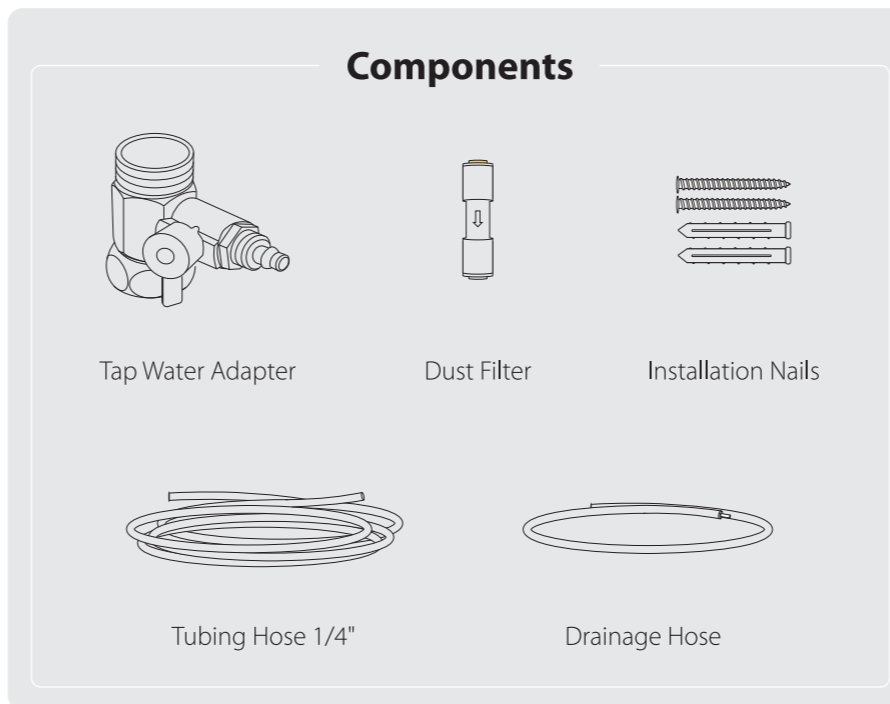


2. Connect the faucet diverter to your faucet. Using Teflon tape (not included) helps prevent leakage.

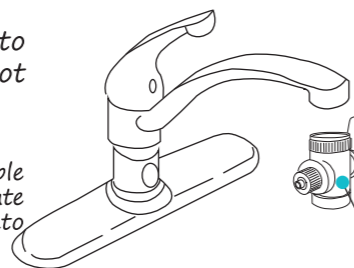

Faucet Diverter

- If the faucet diverter is not compatible with your faucet, choose an appropriate size adaptor to fit the diverter onto the faucet.
- Make sure the rubber washer is inside the diverter valve before screwing it onto the faucet. This guarantees a proper seal.
- Do not run warm water to use the unit. It may cause malfunction.


4. Attach the other end of the dust filter to the hose (1/4"). Connect the hose to the water supply inlet (1/4") on the machine.

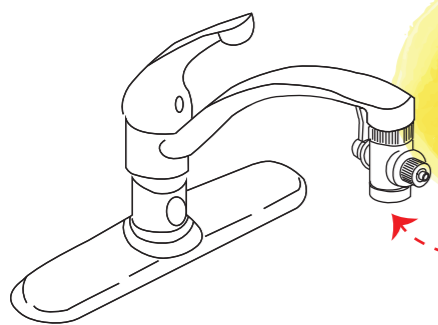

3. Remove the nut on the side of the tap water adapter. Connect the hose (1/4") to the adapter.
Attach the dust filter to one end of the hose by clicking it in place.


Nut
Dust Filter

1/4" Hose

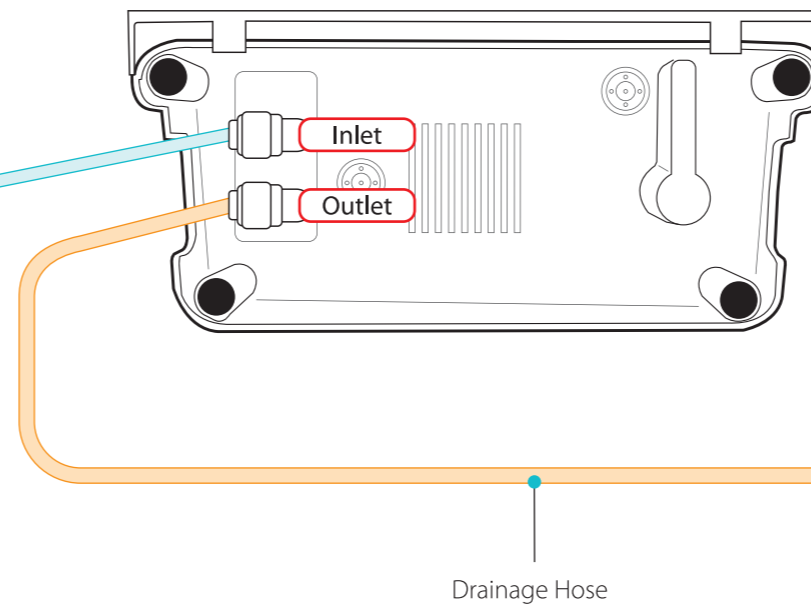

Drainage Hose

5. Attach the drainage hose to the water outlet on the machine and place it inside the sink.

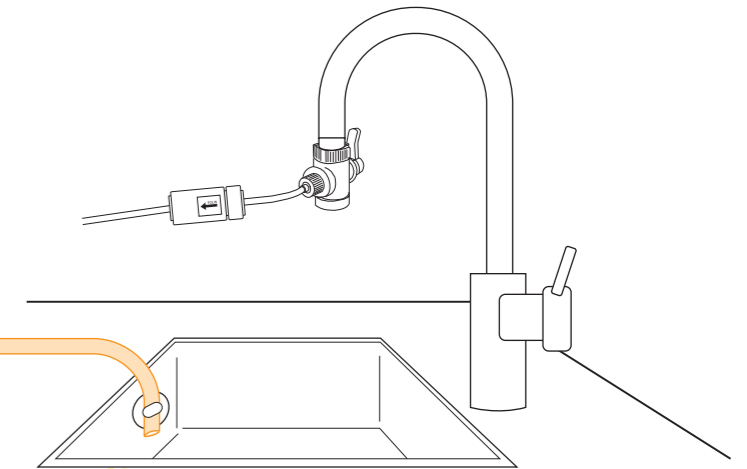

6. Make sure all connections are secure. Open the main valve and turn the power on. Make sure to use **cold water** to operate the unit.



Please visit our website for videos on how to install.